



Wilcoxon Research model 786-500-D2 Low frequency Class I Division 2 accelerometer




Features

- Rugged design
- High sensitivity
- Hermetic seal
- Case isolated
- ESD protection
- Reverse wiring protection
- EMI / RFI shielded

Benefits

- Clear signals at low vibration levels
- Extended low end frequency response
- Improved signal to noise ratio versus other general purpose accelerometers
- A single sensor can detect both low and high speed vibrations
- Optimized to detect vibration on slow turning machinery like cooling tower fans and slow speed gearboxes

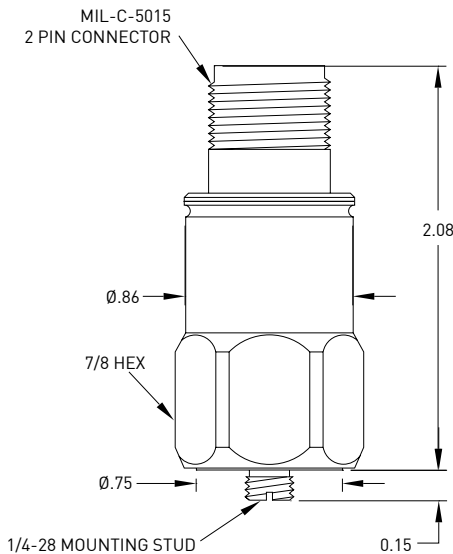

Dynamic

Sensitivity, $\pm 5\%$, 25° C.....	500 mV/g
Acceleration range	10 g peak
Amplitude nonlinearity.....	1%
Frequency response:	
$\pm 5\%$	0.7 - 5,000 Hz
$\pm 10\%$	0.5 - 9,000 Hz
± 3 dB	0.2 - 14,000 Hz
Resonance frequency.....	30 kHz
Transverse sensitivity, max.....	5% of axial
Temperature response:	
-50° C.....	-5%
+120° C.....	+5%

Electrical

Power requirement:	
Voltage source	18 - 30 VDC
Current regulating diode	2 - 10 mA
Electrical noise, equiv g:	
Broadband 2.5 Hz to 25 kHz	250 μ g
Spectral	
10 Hz	2.5 μ g/√Hz
100 Hz	1.5 μ g/√Hz
1000 Hz	1.5 μ g/√Hz
Output impedance, max	100 Ω
Bias output voltage	12 VDC
Grounding	case isolated, internally shielded

Environmental

Temperature range	-50 to 120° C
Vibration limit.....	500 g peak
Shock limit	5,000 g peak
Electromagnetic sensitivity, equiv g, max	70 μ g/gauss
Sealing	hermetic
Base strain sensitivity, max	0.0002 g/ μ strain

Physical

Sensing element design.....	PZT, shear
Weight.....	90 g
Case material.....	316L stainless steel
Mounting	1/4-28 UNF tapped hole
Output connector	2 pin, MIL-C-5015 style
Mating connector	R6 type
Recommended cabling	J10 / J9T2A, no longer than 100 ft

Connections

Function	Connector pin
ground	shell
power / signal	A
common	B


Note: Frequency response limits, spectral and noise values are typical
Accessories supplied: SF6 mounting stud (metric mounting available); calibration data (level 2)

Meggitt Sensing Systems
20511 Seneca Meadows Parkway
Germantown MD 20876
USA

Tel: 301 330 8811
Fax: 301 330 8873
Email: wilcoxon@meggitt.com

www.wilcoxon.com
www.meggitt.com

MEGGITT
smart engineering for
extreme environments
99066 Rev.A 12/11



Class I, Div 2 Groups A, B, C, D
Class I, Zone 2 Ex nA II T4

For hazardous area locations, sensor must be installed in accordance with installation instructions or local code requirements.

