


For use with 4...20 mA-output



Control elements:

- LED 1: Signal strength
- LED 2: Material flow
- S1: Switching between working current / closed current
- S2: Coarse adjustment of sensitivity
- P1: Threshold level
- P2: Delay time

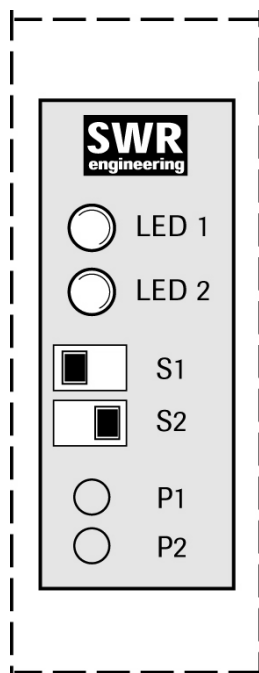