



## TQ 442 / EA 402 / IQS 450

### Proximity measuring system

#### FEATURES

- » From the Vibro-Meter® product line
- » Non-contact measurement system based on eddy current principle
- » Certified for use in potentially explosive atmospheres
- » 1 m, 5 m and 10 m systems
- » Temperature compensated system
- » Voltage or current output with protection against short circuits
- » Frequency response:  
DC to 20 kHz (-3 dB)
- » Measuring range:  
2 mm or 4 mm
- » Temperature range:  
-40 to +180°C



TQ 442



IQS 450



#### DESCRIPTION

This proximity system allows contactless measurement of the relative displacement of moving machine elements. It is particularly suitable for measuring the relative vibration and axial position of rotating machine shafts, such as those found in steam, gas and hydraulic turbines, as well as in alternators, turbo-compressors and pumps.

The system is based around a TQ 442 non-contact transducer and an IQS 450 signal conditioner. Together, these form a calibrated proximity system in which each component is interchangeable. The system outputs a voltage or current proportional to the distance between the transducer tip and the target, such as a machine shaft.



Information contained in this document may be subject to Export Control Regulations of the European Union, USA or other countries. Each recipient of this document is responsible for ensuring that transfer or use of any information contained in this document complies with all relevant Export Control Regulations. ECN N/A.

**DESCRIPTION** *(continued)*

The active part of the transducer is a coil of wire that is moulded inside the tip of the device, made of Torlon® (polyamide-imide). The transducer body is made of stainless steel. The target material must, in all cases, be metallic.

The transducer body is available with metric or imperial thread. The TQ 442 version is mounted at 90 degrees to the mounting surface. It has an integral coaxial cable, terminated with a self-locking miniature coaxial connector. Various cable lengths (integral and extension) can be ordered.

The IQS 450 signal conditioner contains a high-frequency modulator/demodulator that supplies a driving signal to the transducer. This generates the

necessary electromagnetic field used to measure the gap. The conditioner circuitry is made of high-quality components and is mounted in an aluminium extrusion.

The TQ 442 transducer can be matched with a single EA 402 extension cable to effectively lengthen the front-end. Optional housings, junction boxes and interconnection protectors are available for the mechanical and environmental protection of the connection between the integral and extension cables.

The proximity system can be powered by associated signal processing modules (for example, VM600 cards) or a rack power supply.

**SPECIFICATIONS**

**Overall proximity system**

**Operation**

Sensitivity

- *Ordering option B21* : 8 mV/μm (200 mV/mil)
- *Ordering option B22* : 2.5 μA/μm (62.5 μA/mil)
- *Ordering option B23* : 4 mV/μm (100 mV/mil)
- *Ordering option B24* : 1.25 μA/μm (31.2 μA/mil)

Linear measuring range (typical)

- *Ordering option B21* : 0.15 to 2.15 mm, corresponding to a –1.6 to –17.6 V output
- *Ordering option B22* : 0.15 to 2.15 mm, corresponding to a –15.5 to –20.5 mA output
- *Ordering option B23* : 0.3 to 4.3 mm, corresponding to a –1.6 to –17.6 V output
- *Ordering option B24* : 0.3 to 4.3 mm, corresponding to a –15.5 to –20.5 mA output

Linearity : See Performance curves on pages 4 and 5

Frequency response : DC to 20 kHz (–3 dB)

Interchangeability of elements : All components in system are interchangeable

**Environmental – explosive atmospheres**


Available in Ex approved versions for use in hazardous locations

| Type of protection Ex i: intrinsic safety ( <b>ordering option A2</b> ) |                                  |  |
|---|----------------------------------|--|
| Europe  | EC type examination certificate  | LCIE 11 ATEX 3091 X<br>II 1G (Zones 0, 1, 2)<br>Ex ia IIC T6 ... T3 Ga |
| International   | IECEx certificate of conformity  | IECEx LCI 11.0061X<br>Ex ia IIC T6 ... T3 Ga                           |
| North America   | cCSAus certificate of compliance | 1514309<br>Class I, Divisions 1 and 2, Groups A, B, C and D<br>Ex ia   |

 **For specific parameters of the mode of protection concerned and special conditions for safe use, please refer to the Ex certificates that are available from Meggitt SA on demand.**

**SPECIFICATIONS** (continued)

| Type of protection Ex nA: non-sparking (ordering option A3) |  |  |
|---|--|--|
| Europe  | Voluntary type examination certificate | LCIE 11 ATEX 1010 X<br>II 3G (Zone 2)<br>Ex nA II T6 ... T3 Gc |
| International   | IECEX certificate of conformity        | IECEX LCI 11.0063X<br>Ex nA II T6 ... T3 Gc                    |
| North America   | cCSAus certificate of compliance       | 1514309<br>Class I, Division 2, Groups A, B, C, D              |

 **When using protection mode 'nA' (non-sparking), the user shall ensure that the signal conditioner is installed in an enclosure that ensures a protection rating of at least IP54 (or equivalent).**

 **For specific parameters of the mode of protection concerned and special conditions for safe use, please refer to the Ex certificates that are available from Meggitt SA on demand.**

**System calibration**

Calibration temperature : +23°C ±5°C  
Target material : VCL 140 steel (1.7225)

Note: If special calibration is required, please define the alloy precisely or supply a sample of alloy (min. Ø50 mm / 1 cm thick) according to Meggitt Sensing Systems' drawing number PZ 7009/1.

**Total system length**

The total system length (TSL) is the sum of the length of the TQ 4xx transducer's integral cable and the length of the EA 40x extension cable. The supported TSLs can be obtained from different combinations of cables.

Total system lengths

- 1 m : 1.0 m integral cable with no extension cable
- 5 m : 0.5 m integral cable + 4.5 m extension cable  
1.0 m integral cable + 4.0 m extension cable  
1.5 m integral cable + 3.5 m extension cable  
2.0 m integral cable + 3.0 m extension cable  
5.0 m integral cable with no extension cable
- 10 m : 0.5 m integral cable + 9.5 m extension cable  
1.0 m integral cable + 9.0 m extension cable  
1.5 m integral cable + 8.5 m extension cable  
2.0 m integral cable + 8.0 m extension cable  
5.0 m integral cable + 5.0 m extension cable  
10.0 m integral cable with no extension cable

The combination of cables selected for a particular total system length depends on the application. For example, to obtain the optimum location for the separation between the integral and extension cables or to eliminate the requirement for an extension cable.


**Total system length trimming**

Due to the characteristics of the coaxial cable, an "electrical trimming" of the nominal length of extension cables is necessary to optimize the system performance and the transducer interchangeability.

TSL for a 1 m measuring chain : 0.9 m minimum  
TSL for a 5 m measuring chain : 4.4 m minimum  
TSL for a 10 m measuring chain : 8.8 m minimum

SPECIFICATIONS (continued)


Performance curves for TQ 442 with IQS 450 (ordering options B21 and B22)

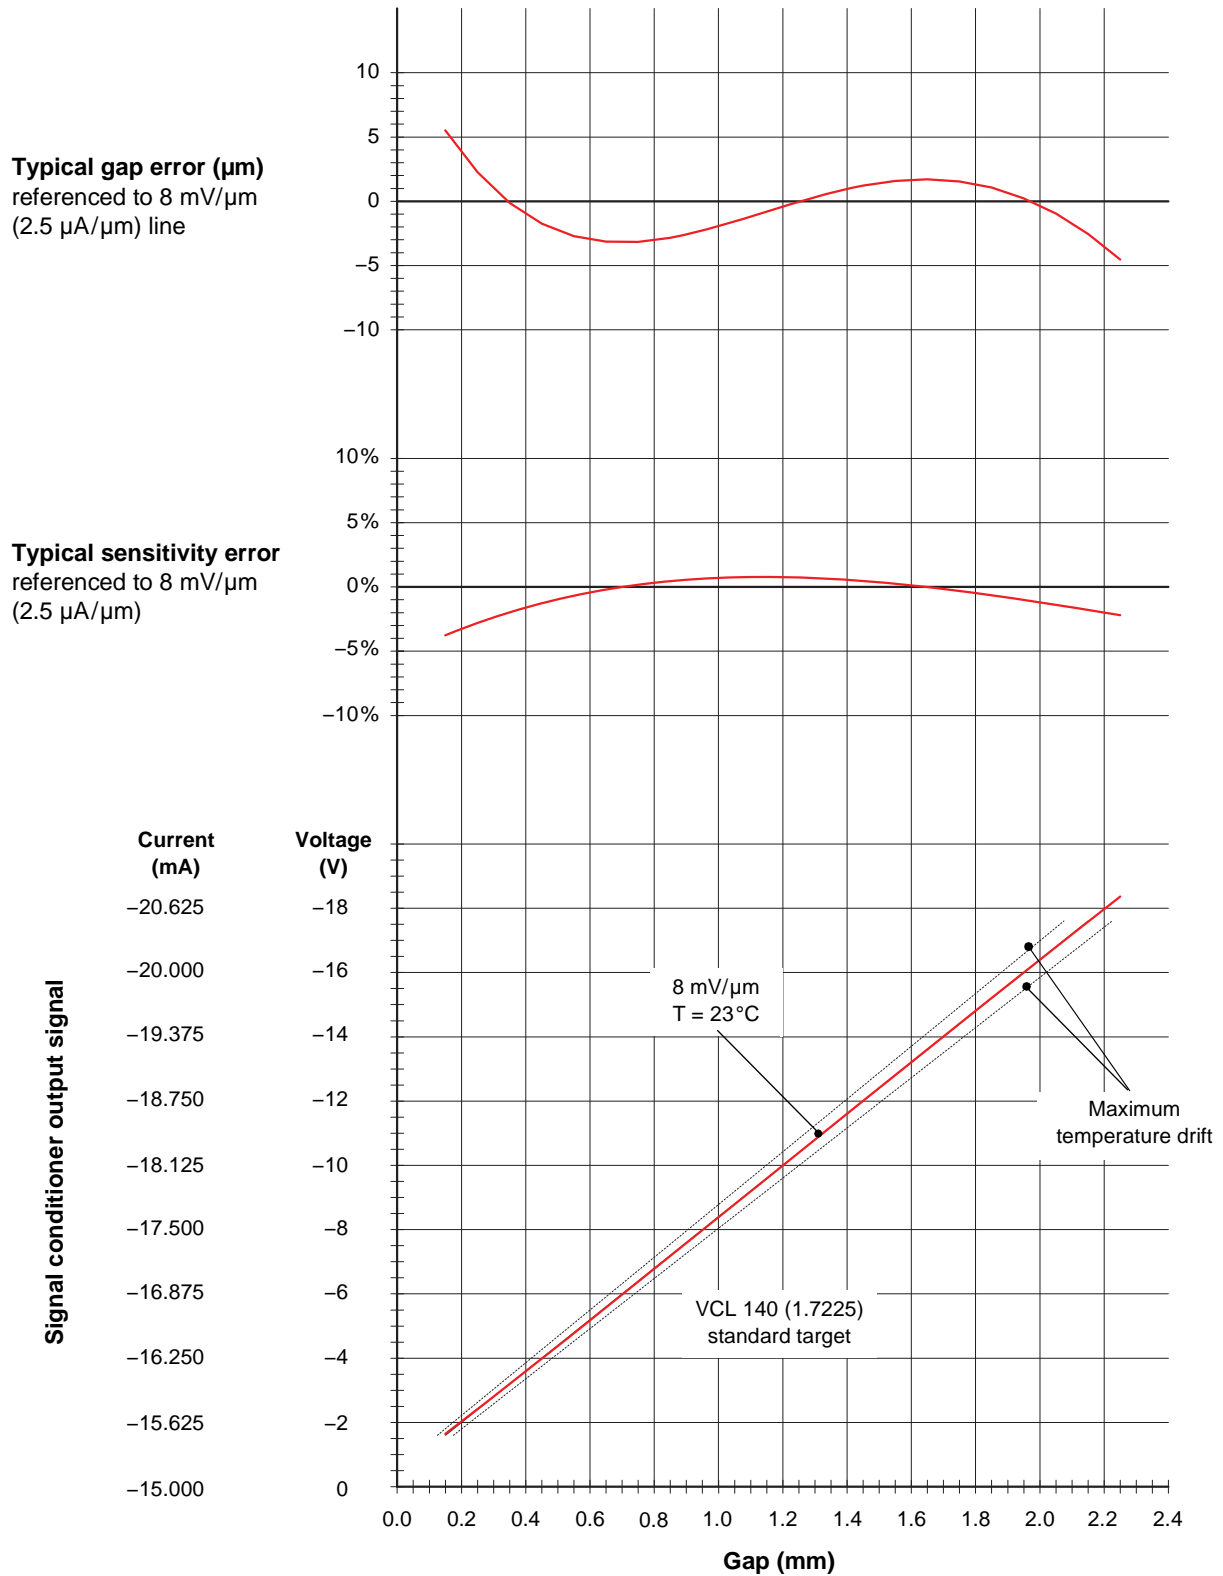

Proximity transducer: TQ 442  
 Signal conditioner: IQS 450 (ordering options B21 and B22)  
 Standard target material: VCL 140 (1.7225)  
 Equivalent materials: A 37.11 (1.0065), AFNOR 40 CD4, AISI 4140

SPECIFICATIONS (continued)

Performance curves for TQ 442 with IQS 450 (ordering options B23 and B24)

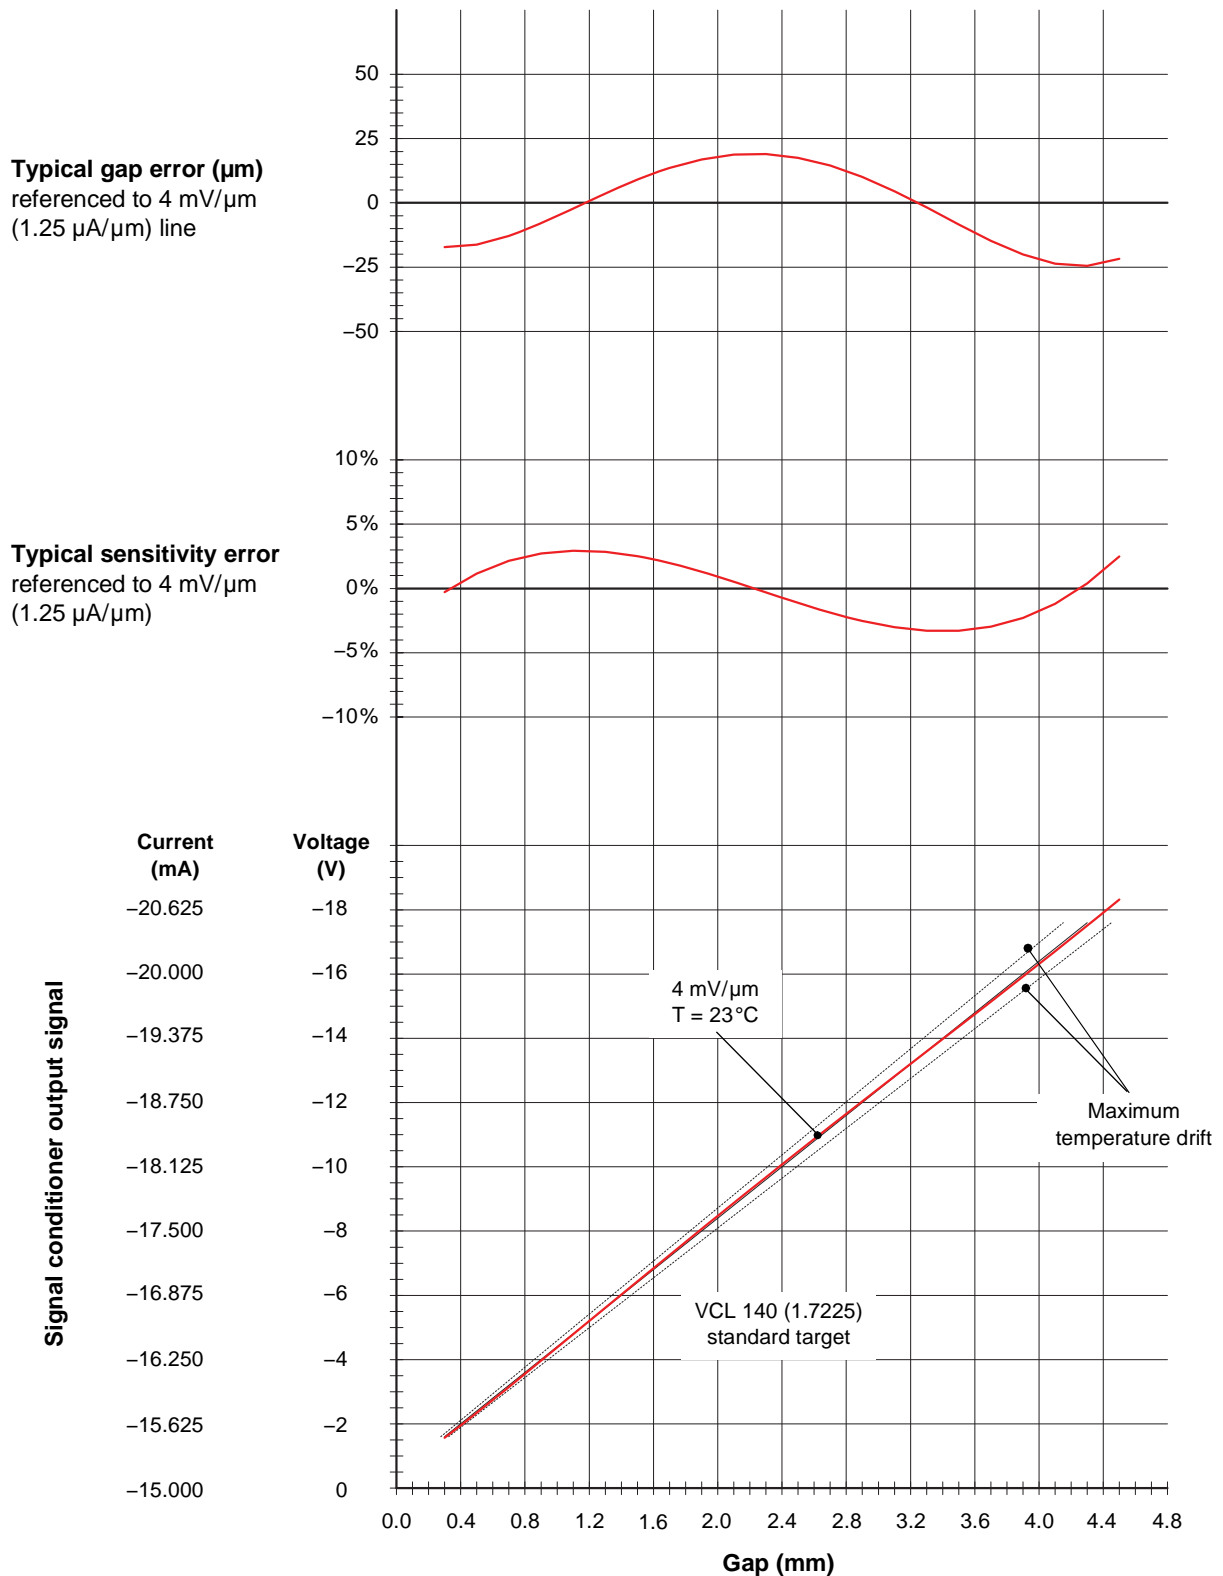

Proximity transducer: TQ 442  
 Signal conditioner: IQS 450 (ordering options B23 and B24)  
 Standard target material: VCL 140 (1.7225)  
 Equivalent materials: A 37.11 (1.0065), AFNOR 40 CD4, AISI 4140

SPECIFICATIONS *(continued)*

---

## TQ 442 proximity transducer and EA 402 extension cable

### General

Transducer input requirements : High-frequency power source from an IQS 450 signal conditioner

### Environmental

Temperature ranges

- *Transducer* : -40 to +180°C with drift < 5% (operating).  
+180 to +220°C with drift > 5% (short-term survival).
  - *Transducer and cable* : **-40 to +195°C if used in an Ex Zone**
  - *Cable, connector and optional protection* : -40 to +200°C
- Protection rating (according to IEC 60529) : The head of the proximity transducer (transducer tip and integral cable) is rated IP68
- Vibration (according to IEC 60068-2-26) : 5 g peak between 10 and 500 Hz
- Shock acceleration (according to IEC 60068-2-27) : 15 g peak (half sine-wave, 11 ms duration)

### Physical characteristics

- Transducer construction : Wire coil Ø8 mm, Torlon (polyamide-imide) tip, encapsulated in stainless steel body (AISI 316L) with high-temperature epoxy glue
- Integral and extension cables : FEP covered 70 Ω coaxial cable, Ø3.6 mm
- Connectors : Self-locking miniature coaxial connectors.  
Note: When connecting, these should be hand-tightened until locked.
- Optional protection
- *Flexible stainless steel hose (protection tube)* : The stainless steel hose provides additional mechanical protection but is not leak-tight.
  - *FEP sheath (extruded fluorinated ethylene propylene)* : The FEP sheath provides resistance to almost all chemicals and low permeability to liquids, gases and moisture. It is also flexible, low friction and mechanically tough.

**SPECIFICATIONS** (continued)**IQS 450 signal conditioner****Output**

Voltage output, 3-wire configuration

- *Voltage at min. gap* : -1.6 V
- *Voltage at max. gap* : -17.6 V
- *Dynamic range* : 16 V
- *Output impedance* : 500  $\Omega$
- *Short-circuit current* : 45 mA

Current output, 2-wire configuration

- *Current at min. gap* : -15.5 mA
- *Current at max. gap* : -20.5 mA
- *Dynamic range* : 5 mA

Output capacitance : 1 nF

Output inductance : 100  $\mu$ H**Supply**

Voltage output, 3-wire configuration

- *Voltage* : -20 to -32 V\*
- *Current* : -13 mA  $\pm$ 1 mA (-25 mA max.)

Current output, 2-wire configuration

- *Voltage* : -20 to -32 V\*
- *Current* : -15.5 to -20.5 mA

Supply input capacitance : 1 nF

Supply input inductance : 100  $\mu$ H**Environmental**

(According to DIN 40040)

Temperature ranges

- *Operating* : -35 to +85°C\*
- *Storage* : -40 to +85°C

Humidity : Max. 95% non condensing.  
100% condensing (not submerged).

Protection rating : IP40

(according to IEC 60529)

Vibration : 2 g peak between 10 and 55 Hz

(according to IEC 60068-2-26)

Shock acceleration : 15 g peak (half sine-wave, 11 ms duration)

(according to IEC 60068-2-27)

**Physical characteristics**

Construction material : Injection moulded aluminium

Mounting : Two or four M4 screws

Dimensions : See Mechanical drawings and ordering information on page 11

\*See Thermal considerations on page 8.

**SPECIFICATIONS** *(continued)*

**Electrical connections**

- Input : Self-locking miniature coaxial connector (female).  
Note: When connecting, this should be hand-tightened, until locked.
- Output and power : Three screw terminals – wire section 2.5 mm<sup>2</sup> (max.)

**Weight**


- Standard version : 140 g (approx.)  
Ex version : 220 g (approx.)

**Signal conditioner with MA 130 mounting adaptor (ordering option I1)**

- Universal DIN rail holder type : TSH 35  
DIN rail type : TH 35-7.5 or TH 35-15  
(according to EN 50022 / IEC 60715)

**Thermal considerations**


The IQS 450 signal conditioner will operate at ambient temperatures as high as 85°C, but to do so, it requires derating of the maximum input voltage. The IQS 450 must operate between the minimum supply voltage and the maximum supply voltage, as shown on the following graph.

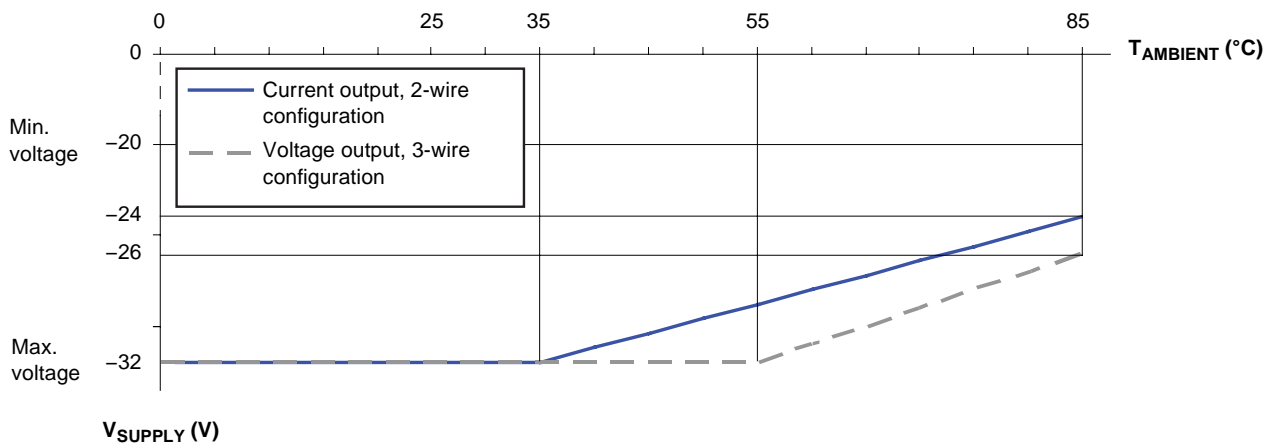



MECHANICAL DRAWINGS AND ORDERING INFORMATION

TQ 442 proximity transducer

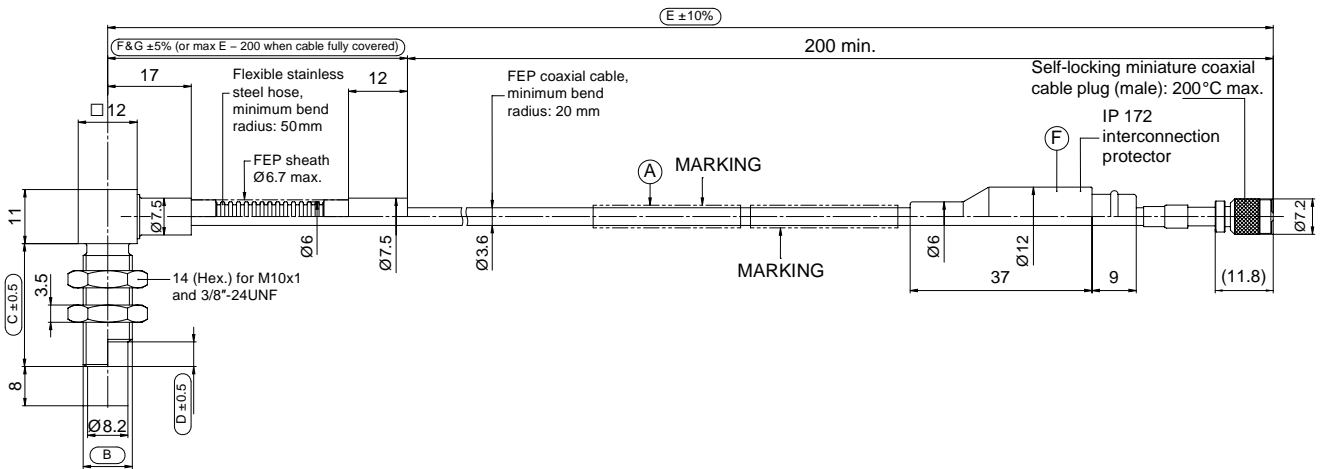

Ordering number:

111 - 442 - 000 - 013 - A B C D E F G H

| Environment (A) |   |
|-----------------|---|
| Standard        | 1 |
| Explosive Ex i  | 2 |
| Explosive Ex nA | 3 |

| Body thread (B) |   |
|-----------------|---|
| M10 x 1         | 1 |
| 3/8"-24UNF      | 6 |

| Body length (C)             |     |
|-----------------------------|-----|
| Each 1 mm, from 18 to 62 mm |     |
| 18 mm min.                  | 018 |
| 62 mm max.                  | 062 |

| Unthreaded length (D)      |     |
|----------------------------|-----|
| Each 1 mm, from 0 to 47 mm |     |
| 0 mm min.                  | 000 |
| 47 mm max.                 | 047 |

| Integral cable length (E) |     |
|---------------------------|-----|
| 0.5 m ±50 mm              | 005 |
| 1.0 m ±100 mm             | 010 |
| 1.5 m ±150 mm             | 015 |
| 2.0 m ±200 mm             | 020 |
| 5.0 m ±500 mm             | 050 |
| 10.0 m ±1000 mm           | 100 |

| Total system length (H) |    |
|-------------------------|----|
| See note 2              |    |
| 1 m                     | 01 |
| 5 m                     | 05 |
| 10 m                    | 10 |

| Flexible hose length (G)    |            |
|-----------------------------|------------|
| See note 1                  |            |
| Each 0.1 m, from 0 to 9.8 m |            |
| 000                         | None       |
| 001                         | 0.1 m min. |
| 098                         | 9.8 m max. |

| Optional protection (F) |                                       |           |
|-------------------------|---------------------------------------|-----------|
| See note 1              |                                       |           |
|                         | Cable                                 | Connector |
| 0                       | None                                  | None      |
| 1                       | Flexible hose                         | None      |
| 2                       | Flexible hose with FEP sheath         | None      |
| 3                       | Movable flexible hose                 | None      |
| 4                       | Movable flexible hose with FEP sheath | None      |
| 5                       | None                                  | IP 172    |
| 6                       | Flexible hose                         | IP 172    |
| 7                       | Flexible hose with FEP sheath         | IP 172    |
| 8                       | Movable flexible hose                 | IP 172    |
| 9                       | Movable flexible hose with FEP sheath | IP 172    |

Notes

All dimensions are in mm unless otherwise stated.

1. When optional protection such as a flexible stainless steel hose with or without an FEP sheath is ordered:


Flexible hose length (G) max. = Integral cable length (E) - 200 mm, for an integral cable that is protected to the maximum extent possible ("cable fully covered").

2. The Total system length (H) = Integral cable length (E) + EA 402 extension cable length.

For information on combining integral and extension cables to obtain a particular total system length, see Total system length on page 3. For information on cable length tolerances, see Total system length trimming on page 3.

MECHANICAL DRAWINGS AND ORDERING INFORMATION (continued)

EA 402 extension cable

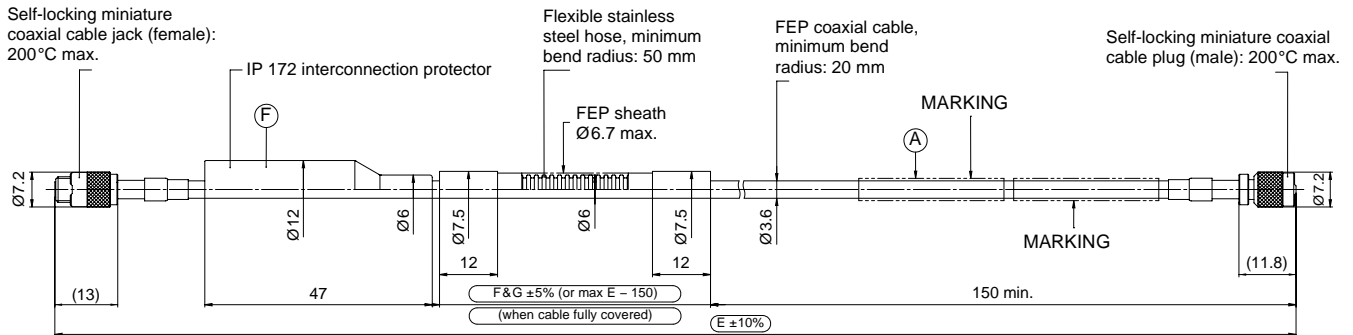

Ordering number: 913 - 402 - 000 - 013



| Environment (A) |   |
|-----------------|---|
| Standard        | 1 |
| Explosive Ex i  | 2 |
| Explosive Ex nA | 3 |

| Extension cable length (E)<br>See note 1 |     |
|--|-----|
| 3.0 m ±300 mm                            | 030 |
| 3.5 m ±350 mm                            | 035 |
| 4.0 m ±400 mm                            | 040 |
| 4.5 m ±450 mm                            | 045 |
| 5.0 m ±500 mm                            | 050 |
| 8.0 m ±800 mm                            | 080 |
| 8.5 m ±850 mm                            | 085 |
| 9.0 m ±900 mm                            | 090 |
| 9.5 m ±950 mm                            | 095 |

| Optional protection (F)<br>See note 2 |           |   |
|---------------------------------------|-----------|---|
| Cable                                 | Connector |   |
| None                                  | None      | 0 |
| Flexible hose                         | None      | 1 |
| Flexible hose with FEP sheath         | None      | 2 |
| None                                  | IP 172    | 5 |
| Flexible hose                         | IP 172    | 6 |
| Flexible hose with FEP sheath         | IP 172    | 7 |

| Flexible hose length (G)    |            |
|-----------------------------|------------|
| Each 0.1 m, from 0 to 9.3 m |            |
| 000                         | None       |
| 001                         | 0.1 m min. |
| 093                         | 9.3 m max. |

Notes

All dimensions are in mm unless otherwise stated.

1. The total system length = TQ 442 integral cable length + Extension cable length (E).

For information on combining integral and extension cables to obtain a particular total system length, see Total system length on page 3.

For information on cable length tolerances, see Total system length trimming on page 3.


2. When optional protection such as a flexible stainless steel hose with or without an FEP sheath is ordered:

Flexible hose length (G) max. = Extension cable length (E) - 150 mm, for an extension cable that is protected to the maximum extent possible ("cable fully covered").




## MECHANICAL DRAWINGS AND ORDERING INFORMATION (continued)

### IQS 450 signal conditioner

**Signal conditioner only  
(ordering option I0)**

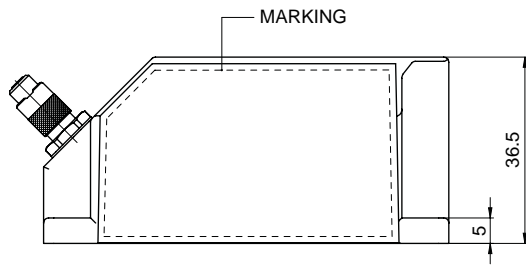

**Signal conditioner  
with MA 130 mounting adaptor  
(ordering option I1)**

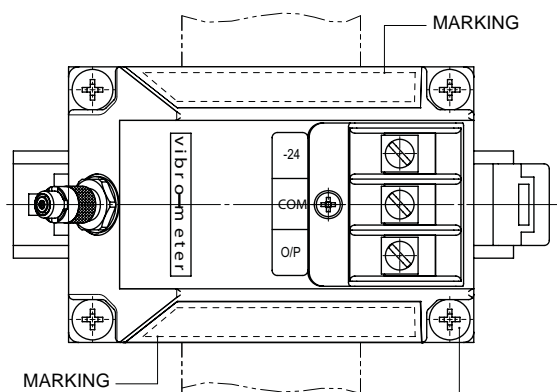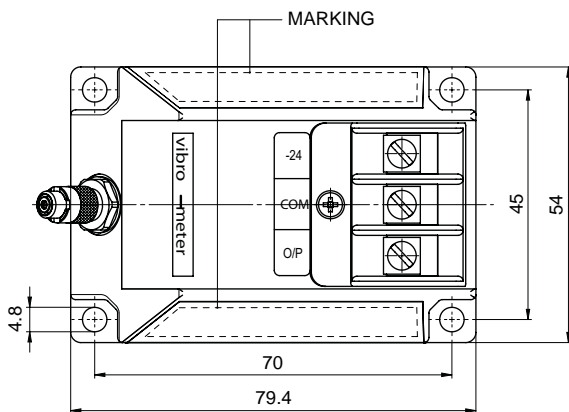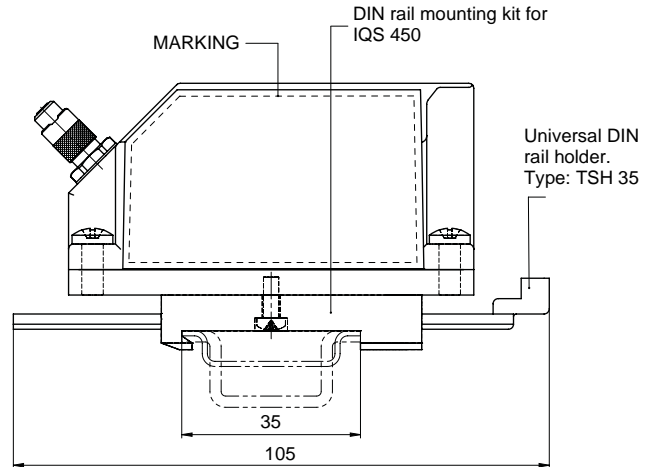

Note: All dimensions are in mm unless otherwise stated.

Self-tapping cross-recess screws.  
Type: WN 1411, KA40 x 10.  
Mounting torque: 0.4 N•m.

Ordering number: 204 - 450 - 000 - 002 - **A** - **B** - **H** - **I**

| Environment (A) |   |
|-----------------|---|
| Standard        | 1 |
| Explosive Ex i  | 2 |
| Explosive Ex nA | 3 |

| Measuring range | Sensitivity (B)       |    |
|-----------------|-----------------------|----|
| 2 mm            | 8 mV/ $\mu$ m         | 21 |
|                 | 2.5 $\mu$ A/ $\mu$ m  | 22 |
| 4 mm            | 4 mV/ $\mu$ m         | 23 |
|                 | 1.25 $\mu$ A/ $\mu$ m | 24 |

| Installation (I) |   |
|------------------|---|
| 0                | Signal conditioner only                                 |
| 1                | Signal conditioner assembled on MA 130 mounting adaptor |


| Total system length (H) |      |
|-------------------------|------|
| 01                      | 1 m  |
| 05                      | 5 m  |
| 10                      | 10 m |

## MOUNTING ACCESSORIES

---

|         |                            |                                      |
|---------|----------------------------|--------------------------------------|
| ABA 15x | Industrial housings        | : Refer to corresponding data sheets |
| ABA 17x | Industrial housings        | : Refer to corresponding data sheets |
| IP 172  | Interconnection protection | : Refer to corresponding data sheet  |
| JB 118  | Junction box               | : Refer to corresponding data sheet  |
| KS 107  | Flexible conduit           | : Refer to corresponding data sheet  |
| MA 130  | Mounting adaptor           | : See below                          |
| SG 1xx  | Cable feedthroughs         | : Refer to corresponding data sheets |

### MA 130 mounting adaptor

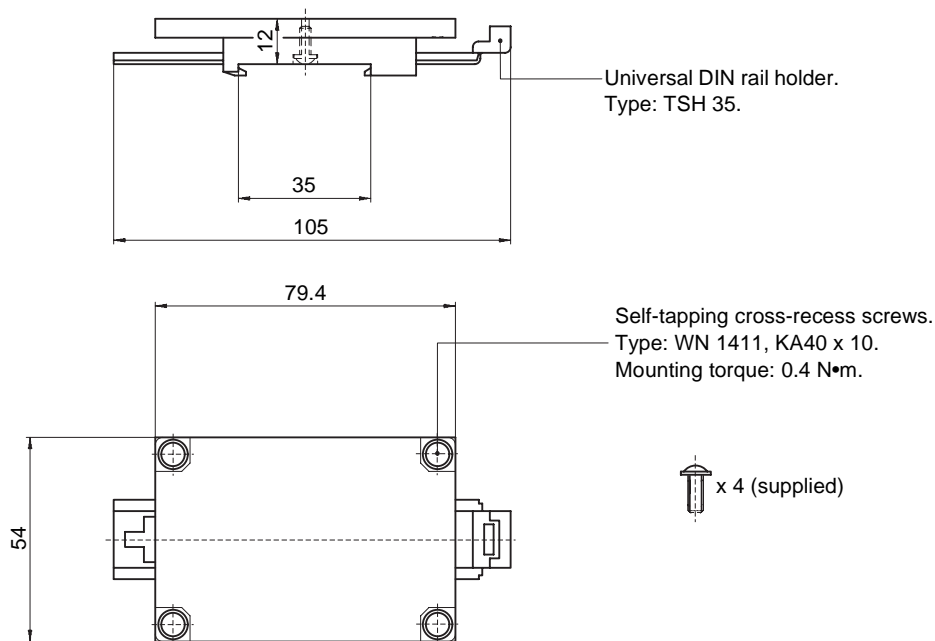

Note: All dimensions are in mm unless otherwise stated.

Ordering number: 809-130-000-011

Headquartered in the UK, Meggitt PLC is a global engineering group specializing in extreme environment components and smart sub-systems for aerospace, defence and energy markets.

Meggitt Sensing Systems is the operating division of Meggitt specializing in sensing and monitoring systems, which has operated through its antecedents since 1927 under the names of ECET, Endevco, Ferroperm Piezoceramics, Lodge Ignition, Sensorex, Vibro-Meter and Wilcoxon Research. Today, these operations are integrated under one strategic business unit called Meggitt Sensing Systems, headquartered in Switzerland and providing complete systems, using these renowned brands, from a single supply base.

The Meggitt Sensing Systems facility in Fribourg, Switzerland was formerly known as Vibro-Meter SA, but is now Meggitt SA. This site produces a wide range of vibration and dynamic pressure sensors capable of operation in extreme environments, leading-edge microwave sensors, electronics monitoring systems and innovative software for aerospace and land-based turbo-machinery.



All statements, technical information, drawings, performance rates and descriptions in this document, whilst stated in good faith, are issued for the sole purpose of giving an approximate indication of the products described in them, and are not binding on Meggitt SA unless expressly agreed in writing. Before acquiring this product, you must evaluate it and determine if it is suitable for your intended application. Unless otherwise expressly agreed in writing with Meggitt SA, you assume all risks and liability associated with its use. Any recommendations and advice given without charge, whilst given in good faith, are not binding on Meggitt SA.

Meggitt Sensing Systems takes no responsibility for any statements related to the product which are not contained in a current Meggitt Sensing Systems publication, nor for any statements contained in extracts, summaries, translations or any other documents not authored by Meggitt Sensing Systems. We reserve the right to alter any part of this publication without prior notice.

In this publication, a dot (.) is used as the decimal separator and thousands are separated by thin spaces. Example: 12345.67890.

## Sales offices

Meggitt Sensing Systems has offices in more than 30 countries. For a complete list, please visit our website.



ISO 9001  
FS 584089



## Your local agent

## Head office

**Meggitt SA**  
Route de Moncor 4  
PO Box 1616  
CH - 1701 Fribourg  
Switzerland

Tel: +41 26 407 11 11  
Fax: +41 26 407 13 01

[www.meggittsensingssystem.com](http://www.meggittsensingssystem.com)  
[www.vibro-meter.com](http://www.vibro-meter.com)