



DATASHEET

# SpeedSys 200

Overspeed protection system

## GAME CHANGING INNOVATION FOR SIL RATED OVERSPEED PROTECTION

SpeedSys 200 is a high-integrity overspeed protection system for rotating machinery. It delivers the core layer of protection with a compact architecture. Its small technical footprint and low-impact installation enables advanced protection to a wide range of applications. The simple and robust design meets the latest safety standards, and features easy maintenance and long proof test intervals.



## ADVANCED PROTECTION FOR A WIDE RANGE OF APPLICATIONS

- Overspeed, underspeed and acceleration protection for critical and semi-critical rotating machinery
- Designed for versatility and scalable to the application
- Suitable for API 670 and API 612 applications

*Typical applications include:*

- Compressors and pumps
- Microturbines
- Wind turbines
- Gas- and steam turbines
- Marine applications


## SAFETY SYSTEM BY DESIGN

- Certified SIL 2 capability
- Fast 8 ms hardware response time (relays)
- 2 safety relays + 1 safety analog output per module
- Suitable for all common sensor types
- External voting for redundant configurations
- Advanced self-monitoring and diagnostics
- 10 years proof test interval (typical)

## VERSATILE ARCHITECTURE

Every channel is designed to work as an independent module. SIL 2 rated protection can be achieved with a single module. To maximize safety or availability, the double pole safety relays can easily be wired into various configurations.

Configuration examples

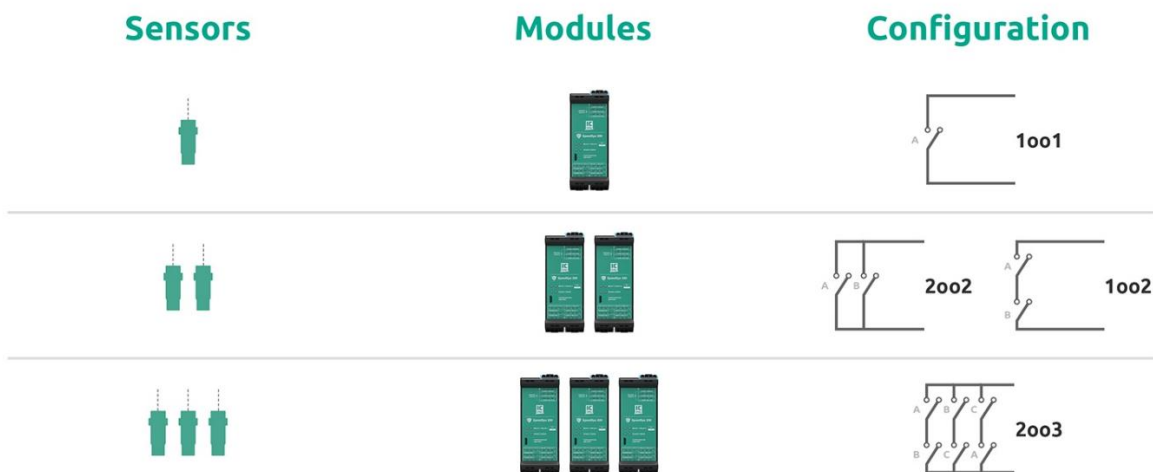

## INPUT

### Input channels

Sensor input	3 separate sensor inputs for different sensor types Note: Only one sensor input can be used at any time
Frequency range	0.025 Hz to 35 kHz
Measurement accuracy	0.05 %

### (1) Hall effect sensor

Input type	3-wire voltage input
Sensor power supply	21.0 V (@ 0 mA) to 15.5 V (@ 15 mA)
Input range	0 V to 24 V
Trigger level (programmable)	0 V to 24 V
Impedance	500 kΩ
Sensor monitoring	Open circuit detection, sensor power supply short circuit detection
Note	Hall effect sensors are typically suitable for cable lengths up to 300 m.

### (2) Electromagnetic sensor (MPU)

Input type	2-wire voltage input
Sensor power supply	n/a
Input range	20 mV <sub>RMS</sub> to 80 V <sub>RMS</sub>
Trigger level (programmable)	0 V to 5 V
Impedance	100 kΩ
Sensor monitoring	Open circuit detection
Note	Electromagnetic sensors are typically suitable for cable lengths from 30 to 300 m, depending on sensor and application design.

**(3) Proximity sensor**

Input type	2-wire current input Note: 2-wire dynamic current eddy current probe ONLY
Sensor power supply	21.0 V (@ 0 mA) to 20.5 V (@ 21 mA) (@ 20 °C) 21.0 V (@ 0 mA) to 20.0 V (@ 21 mA) (@ 60 °C)
Input range	0.0 mA to 21.0 mA
Trigger level (programmable)	0.0 mA to 20.5 mA
Sensor monitoring	Open circuit detection, short circuit detection
Note	Proximity sensors are typically suitable for cable lengths up to 1000 m.

**OUTPUT****Safety relays**

Number	2 safety relays (relay 1 & 2)
Type	Double pole single throw (DPST) safety relays 2 x COM and 2 x NO contacts available per relay
Function	User-configurable relays for overspeed, acceleration and/or underspeed limits and/or system status
Maximum switching capacity	30 V <sub>DC</sub> / 2 A (resistive load) 30 V <sub>DC</sub> / 100 mA (inductive load)
Hysteresis	User-configurable
Safe state	Normally open (de-energized to trip)
SIL safety	Yes. The safety relays are part of the SIL approvals and can be used for critical machine protection applications as specified.

**Additional relays**

Number	2 relays (relay 3 & 4)
Type	Single pole single throw (SPST) relays 1 x COM and 1 x NO contacts available per relay
Function	User-configurable relays for overspeed, acceleration and/or underspeed limits and/or system status
Maximum switching capacity	30 V <sub>DC</sub> / 2 A (resistive load) 30 V <sub>DC</sub> / 100 mA (inductive load)
Hysteresis	User-configurable
Safe state	User-configurable normally open or normally closed
SIL safety	No. The additional relays are NOT part of the SIL approvals and cannot be used for critical machine protection applications.

**Analog output**

Number	1 analog output
Type	4 to 20 mA current loop
Function	User-configurable range to transmit current output value equivalent to the measured speed.
Resolution	16 bit (0 – 24 mA)
Accuracy	0.1 %
Safe state	Output driven to configurable out of range value
SIL safety	Yes. The analog output is part of the SIL approvals and can be used for critical machine protection applications as specified.

**Digital frequency output**

Number	1 frequency output
Type	Digital open collector output
Signal	Max 24 V <sub>DC</sub> / 100 mA

**Status LED indicators**

Relay indicators	2 LED indicators for safety relay status
Power / error indicators	2 LED indicators for power and module status

## SYSTEM

---

**Reaction time**

Measurement time (T <sub>m</sub> )	Dependent on signal frequency and averaging, typically ≤ 2 ms
Hardware reaction time (T <sub>h</sub> )	Relays: ≤ 8 ms Analog out: ≤ 100 ms
Total reaction time (T <sub>h</sub> + T <sub>m</sub> )	Relays, typical: ≤ 10 ms Analog out, typical: ≤ 100 ms

**PC interface**

USB-B mini for programming and status reading  
(Windows® 7 and higher proprietary software application)

**Power supply input**

Number	2 redundant power supply inputs
Input voltage range	24 V <sub>DC</sub> (18 V <sub>DC</sub> to 36 V <sub>DC</sub> )
Current consumption	210 mA @ 24 V <sub>DC</sub>
Reverse polarity protection	Yes

**Heat dissipation**

Maximum 5.0 W (@ 24 V<sub>DC</sub>)

**Housing**

Material	Polyamide (PA 66 GF 30)
Dimensions	45 x 117 x 114 mm (1.77 x 4.61 x 4.49")
Mounting assembly	DIN rail
Connectors	9 plug-in connectors with 4 contacts, screw type terminals
Weight	± 350 g

**Environmental conditions**

Operating temperature	-20 to 60 °C (-4 to 140 °F)
Storage temperature	-40 to 85 °C (-40 to 185 °F)
Operating humidity	5 to 80 % RH (non-condensing)
Storage humidity	5 to 85 % RH (non-condensing)

**Ingress protection**

IP20 according to IEC 60529  
Indoor use or use in a protective enclosure

**Other**

Over voltage category II  
Pollution degree 2




**Warranty**


24 months from date of invoice

## APPROVALS

EU conformity	CE
US and Canada	cMETus
Electromagnetic compatibility	FCC 47 CFR, part 15 (according to ANSI C 63.4) EN 61326-1 and EN 61326-3-1 EN 55011
Environmental	RoHS compliant (2011/65/EU)
Hazardous areas	Ex ia; intrinsic safety on sensor inputs (See chapter: Hazardous Areas)
Functional safety	SIL 2 capable according to IEC 61508
API conformity	Suitable for compliance to API 670 and API 612

## HAZARDOUS AREAS

Type of protection	Ex ia; intrinsic safety on sensor inputs
Approval marking	 
Identifiers	 IECEx IBE 20.0045 IBExU20ATEX1157
Important information	Certification refers to sensor input only. Refer to the certificates for specific parameters of the mode of operation and special conditions of use.

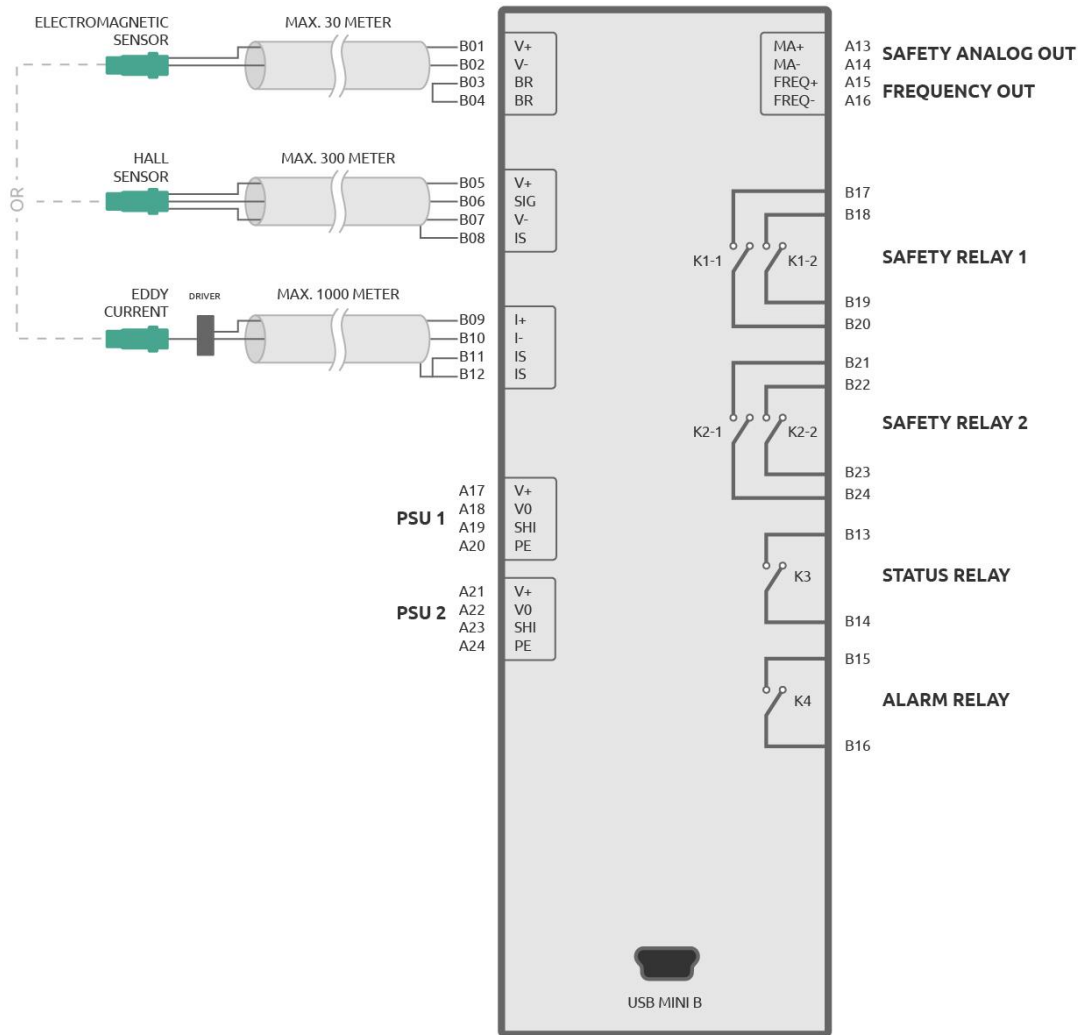

## ABOUT ISTECH

We ensure maximal value generation of your critical machinery with advanced protection and monitoring solutions. Every Istec product is designed to meet the increasing demands of industrial applications and taps into our 50 years of experience in the industry.

Our expertise is to support and maintain these critical sensors and systems in the field throughout their operational life; to increase safety, maximize machine availability and to provide new monitoring data and machine insights.

### Questions and support?

We are ready to help you!  
Visit [www.istec.com/support](http://www.istec.com/support)

### Contact Istec International

Meer en Duin 8  
2163 HA, Lisse Netherlands

+31 (0)252 433 400  
[www.istec.com](http://www.istec.com)

This product has been tested according to the listed standards. If the product is used in a manner not specified by manufacturer the degree of protection may be impaired. Therefore, the product documentation must be read completely, carefully and all safety instructions must be followed.

The information in this document, like descriptions, drawings, recommendations and other statements, was drawn in good faith to be correct, but the completeness and accuracy of this data cannot be guaranteed. Not all possibilities or situations are described in the product documentation. Before using this product, the user must evaluate it and determine its suitability to the intended application.

Note: Specifications are subject to change without notice. Always check for the latest version with your supplier. This document is cleared for public release.